

www.millersoils.co.uk

DATA SHEET NO: 7986

PRODUCT NAME/VISCOSITIES:

ZSS 10w40

DESCRIPTION:

The ZSS 10w40 is a high performance semi-synthetic 4-stroke motorcycle engine oil. It includes a combination of the highest quality performance additives in synthetic and mineral base stocks.

APPLICATION:

As received for engine lubrication of high performance 4-stroke motorcycle, kart and scooter engines specifying a 10w40 viscosity oil.

USER BENEFITS:

- Recommended for the majority of Japanese and European 4 stroke motorcycles.
- Suitable for off-road, on-road and track day use.
- Sophisticated performance additive package offers maximum protection and reliability.
- Suitable for use in machines fitted with oil immersed 'wet' clutches.

PERFORMANCE PROFILE:

- API SG/SH/SJ
- JASO MA / MA2

TYPICAL CHARACTERISTICS:


SAE Viscosity Grade	10w40
Specific Gravity @ 15°C	0.871
Kinematic Viscosity @ 100°C	13.5cSt
Kinematic Viscosity @ 40°C	89.6cSt
Viscosity Index	152
Pour Point °C	<-25
Flashpoint °C	>200
Cold Crank Viscosity @ -25°C	7,000cP max



MOTORBIKE



PRODUCT DATA SHEET

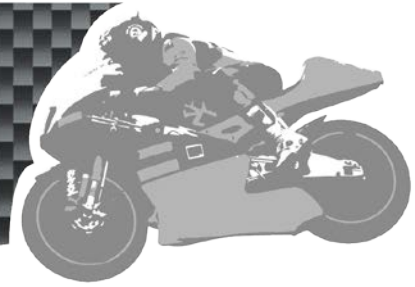

www.millersoils.co.uk

HEALTH AND SAFETY:

Health and Safety Data Sheet 7986 applies to this product. When used for the purpose recommended and with due regard to the appropriate Health and Safety Data, the product should cause no concern. If in doubt, consult with Millers Oils Technical Department.

For Technical assistance call +44 (0) 1484 475060 or email technical@millersoils.co.uk

DT: 04/01/17

Millers Oils Ltd
Brighouse, West Yorkshire
HD6 3DP, UK
Tel: +44(0)1484 713201
Visit: millersoils.co.uk

